


Assembly Instructions for Antenna, Mount and Cable Assembly

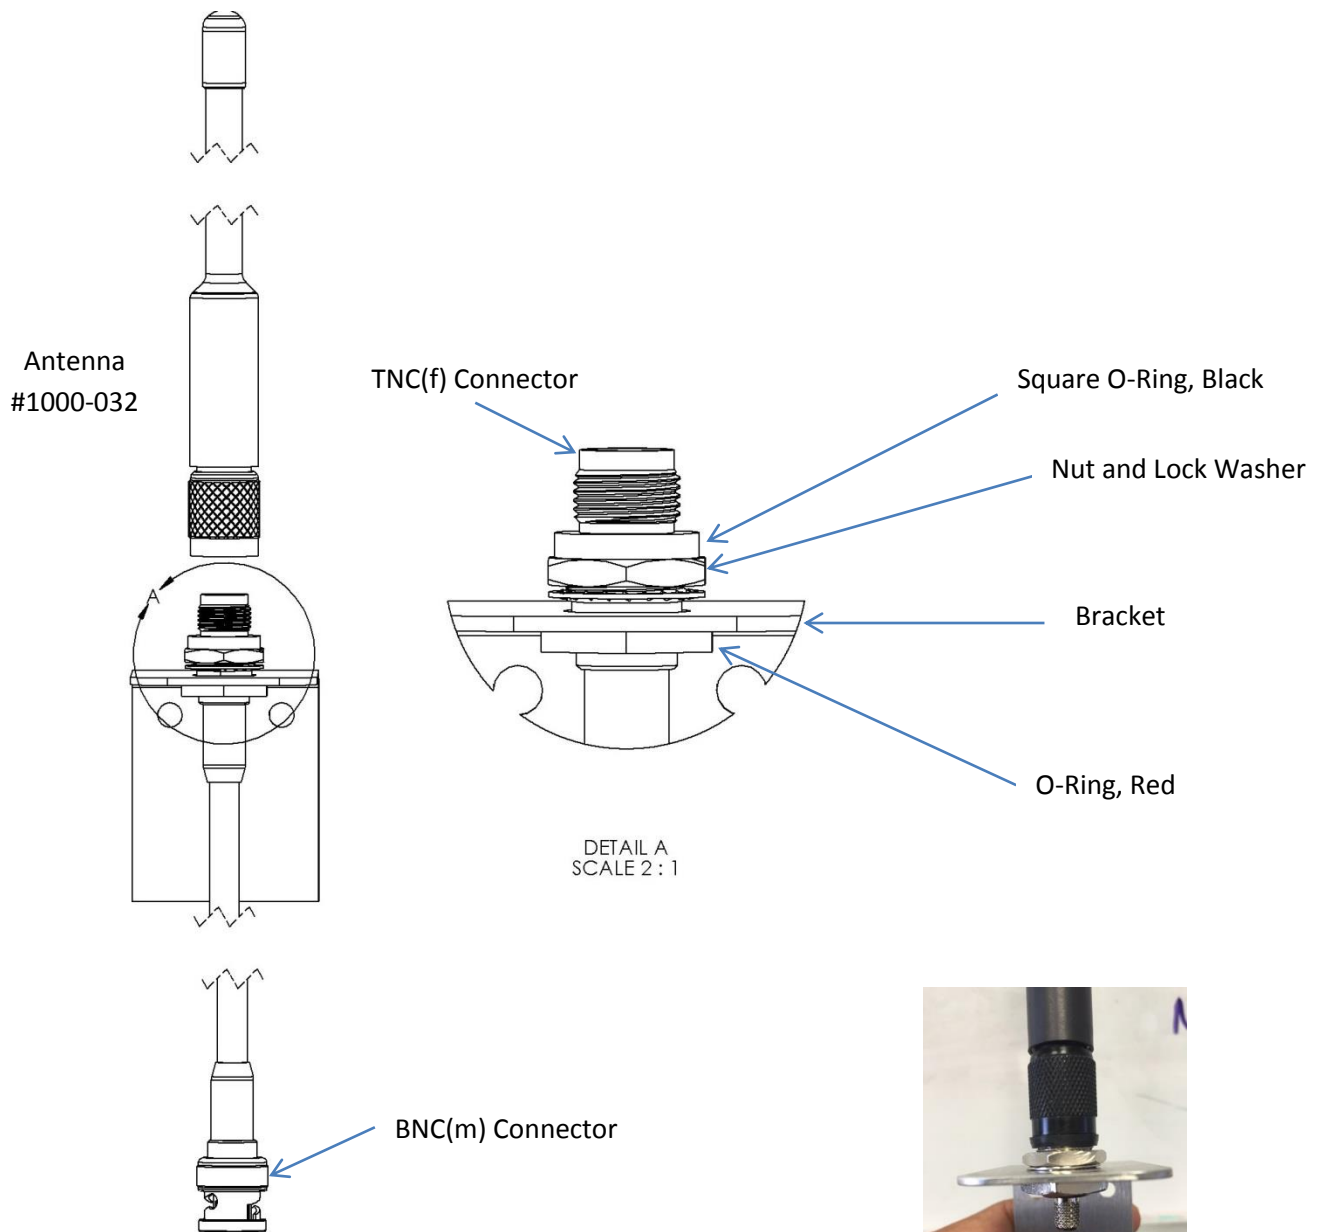

The coaxial cable has two different connectors. The BNC connector has a rotating lock that connects to the back of the ALERT2 Receiver. The other end has a TNC connector that attaches to the antenna mount. These instructions are for mounting the cable to antenna mount.

The red O-Ring goes in the groove on the base in the bulkhead TNC connector on the cable assembly. The Connector is then fed through the mount. Note, the connector and mount have a flat slot to properly position the cable against the mount. Next, the lock washer and nut are added to the connector and tightened down. The black O-Ring is then added prior to connecting the antenna to the assembly. Push the O-Ring down till it rests in the groove between the lower and upper threaded area of the antenna. Connect the antenna by screwing down till antenna base it tight against the black O-Ring.